


VT440 Dry Contact Extension Unit

Monitor:

- UPS
- General, fault Alarm
- System Healthy status
- Door, window status
- HVAC on/off state

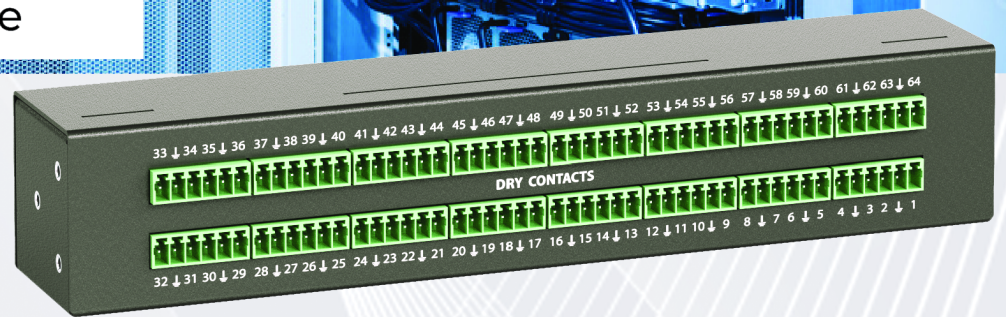

The **VT440 Dry Contact Extension Unit** increases the number of dry contact input terminals connected to any Vutlan monitoring unit. Each VT440 adds 32 dry contacts, providing scalable monitoring capabilities for complex infrastructures. Multiple VT440 units can be chained using CAN bus port.

The number of dry contacts inside VT440 can be increased up to 64 with an extension module "VT32 / dry contacts module".

Device type	CAN bus device
Inputs / Outputs	x32 dry contacts inputs terminals (2 wires), x2 CAN ports RJ-12
Daisy chain	Yes
Status Indicators	Red (Error), Green Led (RUN)
Max. Distance	225m
Mounting possibilities	19" rack-mountable, Desktop, Wall mount
Order options	"VT440" with x32 contacts or "VT440 + VT32" with x64 contacts

